Verderair VA 15 Non-metallic

Description

The VA15 non-metallic double diaphragm pumps are excellent pumps for use in a wide range of applications across many industries. Special versions are available to make them easy to install on standard drums. The pumps are available in 4 different materials for the pump body and 6 different materials for the diaphragms. This makes it possible to select the best solution for your application.

Your benefits

- → Dry self-priming
- 🔺 Can run-dry without damage
- $_$ Easy to install, operate and maintain
- 🔺 Less downtime
- → Free of air lubrication
- → Non-stalling air valve

Technical data				
Weight [kg]	Fluid & air section	DP	3,5	
		PP, CP	2,9	
		KP	3,9	
Max sustion lift [mus]		Dry	4,5	
Max. suction lift [mwc]		Wet	7,6	
Temperature [°C]	Fluid section	Internals		
	К	BN,HY,SP,TO	4	82
	К	TF, VT	4	107
	P, C	All internals	4	66
	D	All internals	4	2
Max. Particle size [mm]			2,5	
Max. recommended viscosity (mPas)			5000	


Code VA15 No.1 No.2 No.3 No.4. No.5 No.6 No.7				
No.1 Fluid section	No. 4 Check valve balls	TO = PTFE/EPDM overmolded		
$\langle \mathbf{E} \mathbf{x} \rangle$ C = Conductive PP	BN = Buna-N	VT = Viton (FKM)		
$\langle Ex \rangle$ D = Acetal	HY = Hytrel (TPE)			
K = Kynar (PVDF)	SP = Santoprene	No. 6 Connections		
P = Polypropylene	SS = Stainless Steel	TN = Threaded NPT		
	TF = PTFE	TB = Threaded BSP		
No.2 Air section	VT = Viton (FKM)	TN = Threated NPT		
P = Polypropylene				
	No.5 Diaphragms	No. 7 Options		
No.3 Check valve seats	BN = Buna-N	OO = Standard		
AC = Acetal	HY = Hytrel (TPE)	DP = Drum Pump		
KY = Kynar (PVDF)	SP = Santoprene	RE = Remote		
PP = Polypropylene	TF = PTFE	SM = Split manifold		
SS = Stainless Steel				


EXAMPLE PUMP TYPE VA15PP PP TF TF TB OO

NOTE not all combinations are available



Verderair VA 15 Non-metallic

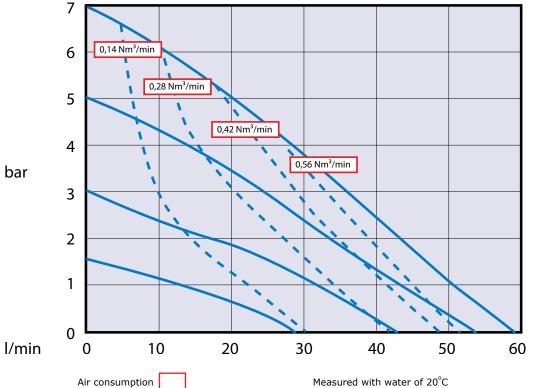

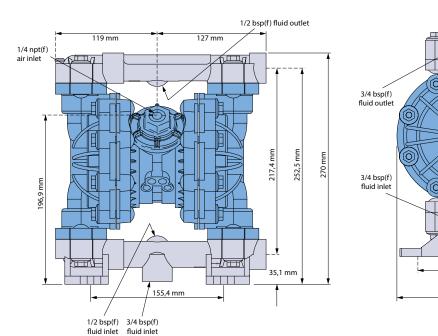

79.5 mm Ó \cap 109,2 mm 158,8 mm

All dimensions are in mm. All dimensions are for guidance only.



VA15nonmet_Technosheet_rev02_2015_(eu)

Find your local supplier at www.verderair.com

For construction, installation and floor mounting drawings please contact your local authorised Verderair® distributor.



Measured with water of 20°C